


Z series

Standard version with two oscillating hubs

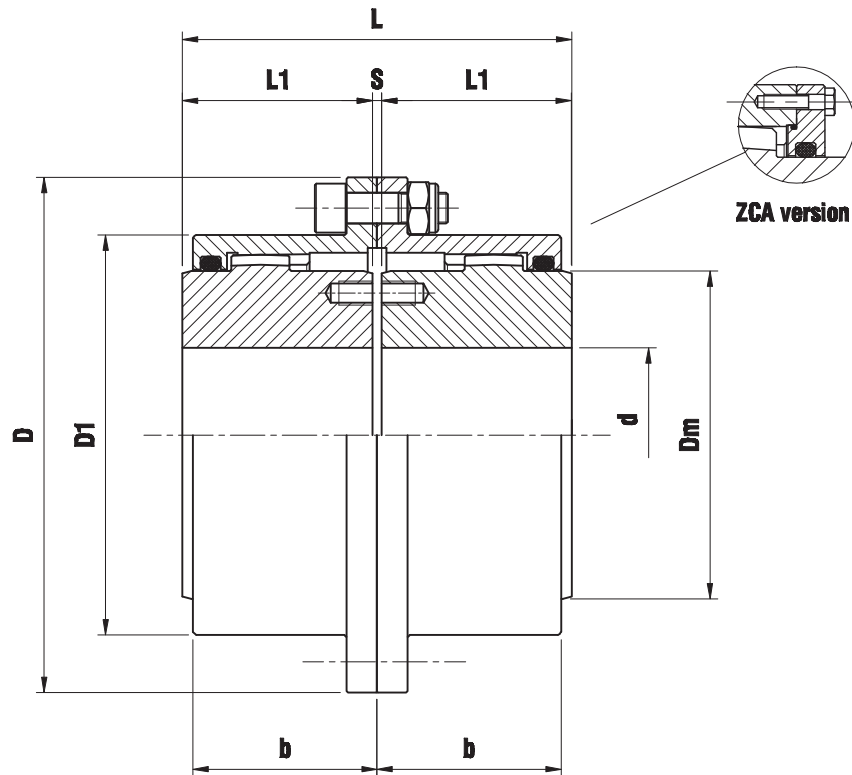

TYPE	TECHNICAL DATA					DIMENSIONS (mm)								Maximum Parallel Misalignment (mm)	Weight (Kg)
	$\frac{N}{n} = \frac{\text{kW}}{\text{rpm}}$	Torque (kNm)		Max Speed (rpm)	PD ² (Kgm. ²)	d max.	D	D1	Dm	L	L1	s	b		
Z - 110	0,19	1,82	4	6200	0,016	50	110	83	69	89	43	3	40	0,15	4,1
Z - 142	0,30	2,85	6,27	5270	0,048	60	142	105	85	103	50	3	46	0,20	7,4
Z - 168	0,59	5,6	12,32	4490	0,136	75	168	131	107	127	62	3	60	0,25	13,7
Z - 200	0,93	8,8	19,36	4010	0,352	95	200	159	133	157	76	5	69	0,30	25
Z - 225	1,50	14,3	31,46	3870	0,672	110	225	184	152	185	90	5	83	0,40	37
Z - 265	2,41	23	50,6	3700	1,564	130	265	212	178	216	105	6	94	0,45	60
Z - 300	3,67	35	77	3200	3,020	150	300	246	209	246	120	6	107	0,50	91
Z - 330	4,64	44,3	97,46	2900	5,044	170	330	275	234	278	135	8	119	0,55	125
Z - 370	7,33	70	154	2580	8,728	190	370	307	254	308	150	8	139	0,60	172
Z - 405	8,80	84	184,8	2350	13,640	210	405	335	279	358	175	8	154	0,70	232
Z - 440	15,95	152,3	335	2170	21,056	230	440	367	305	388	190	8	166	0,80	302
Z - 500	21,34	203,8	448,3	1820	42,276	280	500	423	355	450	220	10	193	1,00	461

Weights and PD² are calculated considering hubs with pilot bore.
 On request we can supply couplings in ZCA version without bells.